


UPUTSTVO ZA UPOTREBU MERDEVINA




UPOZORENJE

PRAVILNO: ✓)

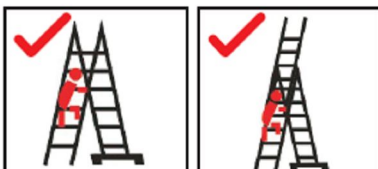


PRAVILNO PENJANJE

NEPRAVILNO:

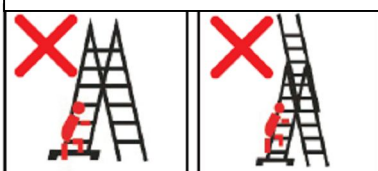






NEPRAVILNO PENJANJE

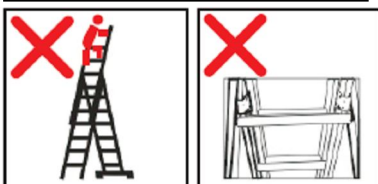

NEMOJTE STAJATI NA 4
PRECKE NA PRODUZENOM
DELU

MERDEVINE MORAJU BITI
ZABRAVLJENE ZA VREME
UPOTREBE

NACIN UPOTREBE (5 NACINA ZA POJEDINE MODELE):

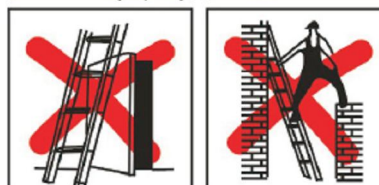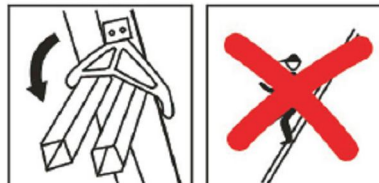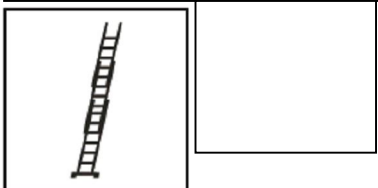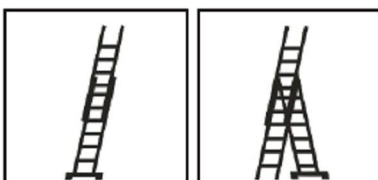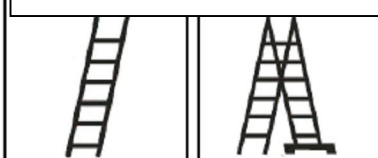


**VAZNO UPOZORENJE! OVE
MERDEVINE PROVODE
ELEKTRICNU STRUJU!**





šifra	8180	8181	8182
broj gazišta	3 x 7	3 x 9	3 x 11
visina (m):			
zatvorene A	1,95	2,45	3,20
otvorene B	3,10	4,00	5,05
produžene C	4,55	6,05	8,45
radna visina C1	4,15	5,35	6,75
max širina (mm)	470	470	470
korak (mm)	250	250	250
debljina zida profila (mm)	1,40	1,40	1,40
težina (kg)	10,00	12,00	16,50
šipka za stabilizaciju (mm)	760	760	860



šifra	11634	11635	11636
broj gazišta	2 x 7	2 x 9	2 x 11
visina (m):			
zatvorene A	1,95	2,45	2,95
otvorene B	1,70	2,20	2,70
produžene C	3,25	4,25	5,25
radna visina C1	2,90	3,90	4,90
max širina (mm)	440	440	440
korak (mm)	250	250	250
debljina zida profila (mm)	1,40	1,40	1,40
težina (kg)	6,80	8,00	10,00
šipka za stabilizaciju (mm)	660	660	660



šifra	11637	11638	11639
broj gazišta	1 x 8	1 x 10	1 x 12
ukupna visina (m)	2,35	2,85	3,35
max širina (mm)	380	380	380
korak (mm)	250	250	250
deb. zida profila (mm)	1,40	1,40	1,40
težina (kg)	3,60	4,40	5,20